



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

- a.HOUSING:PA66 UL94V-0
b.CONTACT:304 Stainless Steel
(SURFACE PLATING: Gold Flash Matte Tin)
SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -55°C~ +105°C

ORDERING INFORMATION

BS-05-A***004

电池座系列

BS-05系列

DIP 90° TYPE



PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2020-08-31

LQ. HUANG

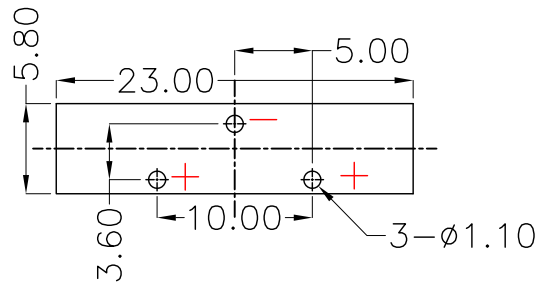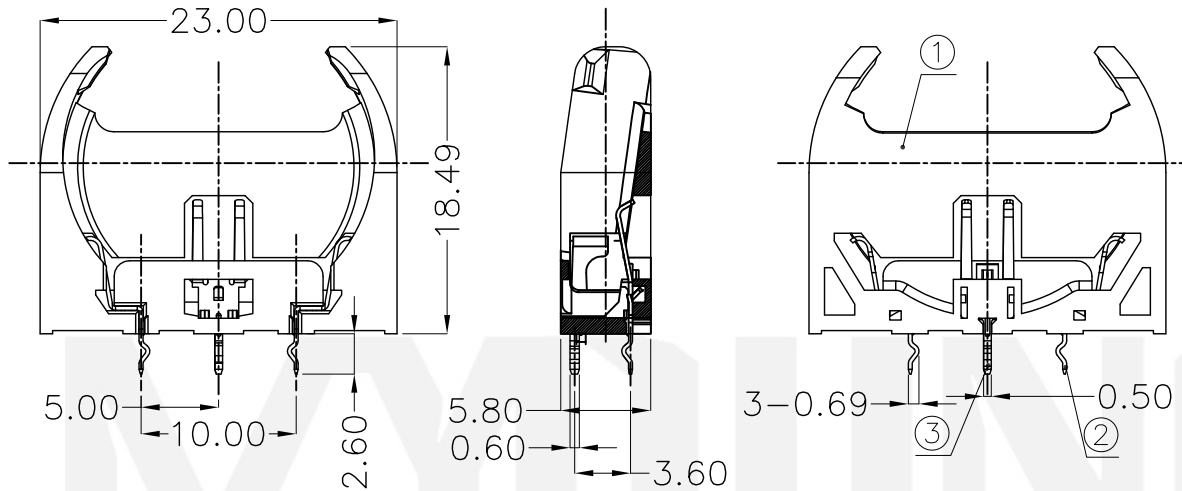

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	304 Stainless Steel, T=0.25MM	Gold Flash Matte Tin
2	TERMINAL(+)	1	304 Stainless Steel, T=0.25MM	Gold Flash Matte Tin
1	HOUSING	1	PA66	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com					
DECIMALS: ANGLES: X :±0.30 X :±1° X.X :±0.25 X.X :±0.5° X.XX :±0.20 X.XXX :±0.10		DSND	YangFeng	DATE	2020-08-31	TITLE:	
		CHKD	ZhouRuicai	DATE	2020-08-31	BS-2032-5-4 DIP半金锡	
		APVD	XueShunyang	DATE	2020-08-31	PART NO.:	
WEIGHT: 0.68g		SCALE: 2:1		SIZE: A4	VIEW: 	BS-05-A1BAK004	
SHEET 1 OF 1		UNIT: mm		REV.: A/0	OBJECT: MY	DRAW NO.:WD-CP-0144	