



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PBT

b.CONTACT:Mn Steel

(SURFACE PLATING: Ni100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C ~ +85°C

ORDERING INFORMATION

BS-24-A***009

电池座系列

BS-24系列

DIP 90° TYPE





PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2017-07-17

ZW DANG

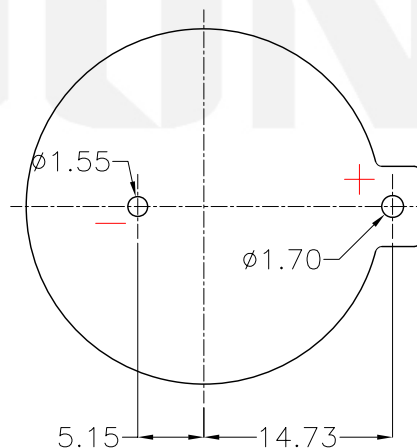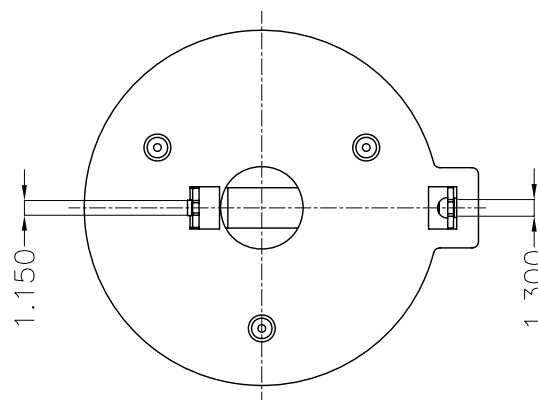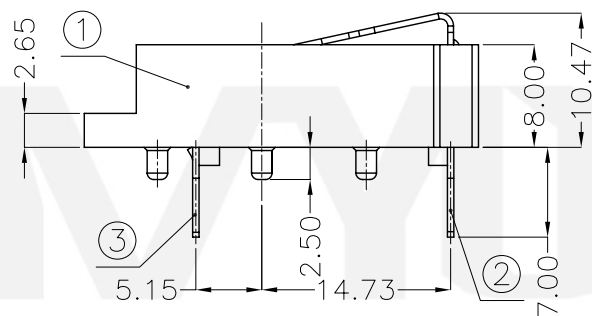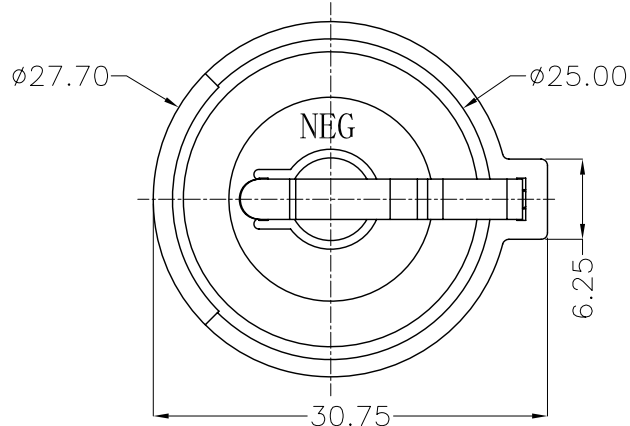

PCB Layout Diagram
Top View

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	Mn Steel,T=0.50mm	Ni Plating
2	TERMINAL(+)	1	Mn Steel,T=0.50mm	Ni Plating
1	HOUSING	1	PBT	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com			
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2017-07-17
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2017-07-17
X.X :±0.25	X.X :±0.5°	APVD	XueShunYong	DATE	2017-07-17
X.XX :±0.20		WEIGHT:	3.41g	SCALE:	2:1
X.XXX :±0.10		SHEET	1 OF 1	SIZE:	A4
		UNIT:	mm	VIEW:	⊙ ⊞
		REV.:	A/0	OBJECT:	MY
				DRAW NO.:	MY-CP-0036