



REV.	ECN NO.	REVISED	DATE

- 1.MATERIAL:
a.HOUSING:LCP UL94V-0
b.CONTACT:SUS301
(SURFACE PLATING:Sn100-120u")
SEE ORDERING INFORMATION

- 2.ELECTRIC:
a.CONTACT RESISTANCE: 50 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

BS-12-B***025

电池座系列

BS-12系列

SMT 180° TYPE


PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2022-10-22

H. WANG

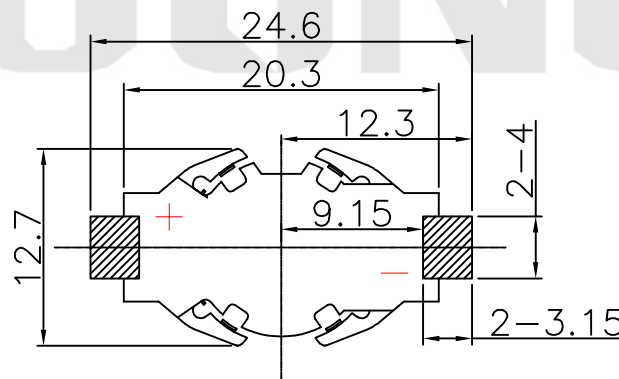

PCB Layout Diagram
Top View

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com			
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2022-10-22
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2022-10-22
X.X :±0.25	X.X :±0.5°	APVD	XueShunYong	DATE	2022-10-22
X.XX :±0.20		WEIGHT:	SCALE: 1:1	SIZE: A4	VIEW:
X.XXX :±0.10		SHEET 1 OF 1	UNIT: mm	REV.: A/0	OBJECT: MY
		TITLE:		BS-1225-4 SMT LCP白色	
		PART NO.:		BS-12-B4AK025	
		DRAW NO.:		WD-CP-0239	

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	SUS301, T=0.15mm	Sn-Plating
2	TERMINAL(+)	1	SUS301, T=0.15mm	Sn-Plating
1	HOUSING	1	LCP	WHITE