



REV.	ECN NO.	REVISED	DATE

NOTE:
1.MATERIAL:
a.HOUSING:PPA
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Au1U")
SEE ORDERING INFORMATION

2.ELECTRIC:
a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE
d.OPERATING TEMPERATURE: -25°C~ +85°C







ORDERING INFORMATION
BS-08-B2AA008

电池座系列
BS-08系列
SMT 180° TYPE

A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"
L-Ni50U"- Sn80U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部
2023-11-23
LQ. HUANG

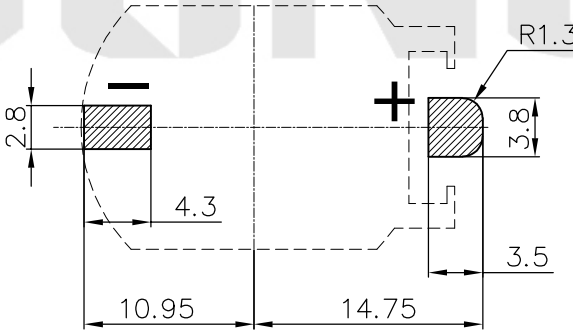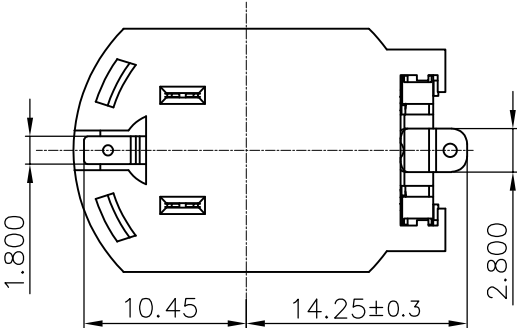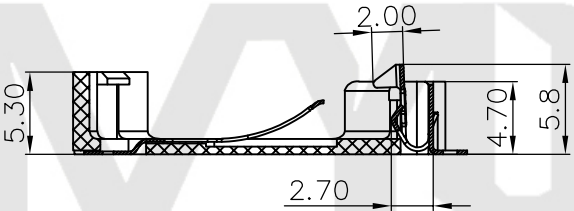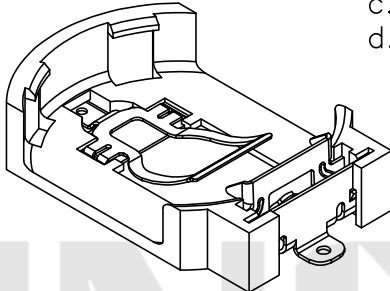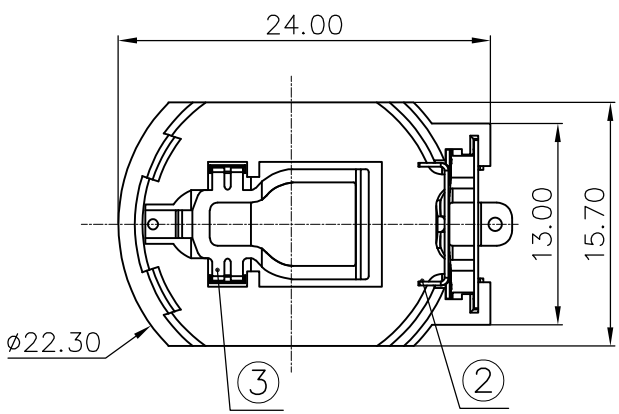

PCB Layout Diagram
Top View

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.25mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com			
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10	ANGLES: X :±1° X.X :±0.5°	DSND	Huanglieqing	DATE	2023-11-23
		CHKD	ZhouRuicai	DATE	2023-11-23
		APVD	XueShunyong	DATE	2023-11-23
WEIGHT: 9		SCALE:	SIZE: A4	VIEW:	BS-2032-8GK SMT
SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	PART NO.: BS-08-B2AA008
				DRAW NO.:MY-CP-0077	