



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:LCP BLACK

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING:Sn100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 50 MILLIOHMS MAX

b.INSULATION RESISTANCE: 100 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC FOR ONE MINUTE

d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

BS-06-A4BK016

电池座系列

BS-06系列

DIP 90° TYPE

PLATING:

A-Au1U"

J-Ni100U"~120U"

K-SN100U"~120U"

MATERIAL:

1A-PBT BLACK

1B-PA66 BLACK

2A-PPA BROWN

2B-PPA BLACK

3A-PPS BROWN

3B-PPS BLACK





4A-LCP WHITE

4B-LCP BLACK

工程部

2023-05-15

LQ. HUANG

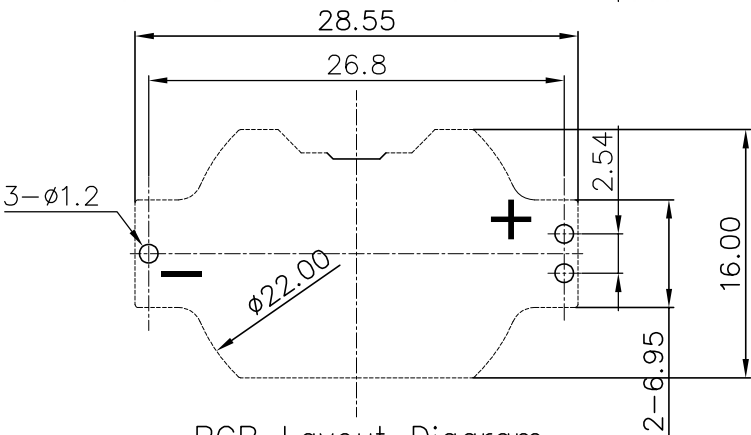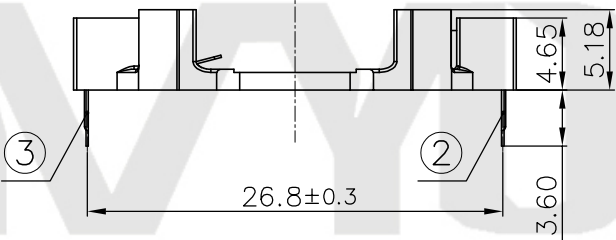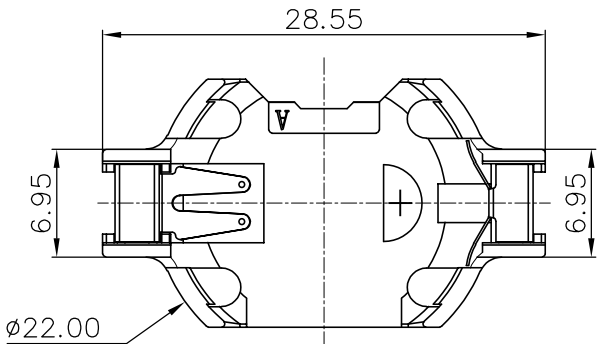

PCB Layout Diagram

Top View

3	TERMINAL(-)	1	C5191 T=0.20MM	Sn(100u"-120u")-Plating
2	TERMINAL(+)	1	C5191 T=0.20MM	Sn(100u"-120u")-Plating
1	HOUSING	1	LCP	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美用 www.meiyangdz.com			
DECIMALS:	ANGLES:	DSND	Lieqinghuang	DATE	2023-05-15
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2023-05-15
X.X :±0.25	X.X :±0.5°	APVD	XueShun Yong	DATE	2023-05-15
X.XX :±0.20		WEIGHT:	9	SCALE:	SIZE: A4
X.XXX :±0.10		SHEET 1 OF 1		VIEW:	UNIT: mm
				REV.:	A/0
				OBJECT:	MY
				TITLE:	
				BS-2032-6-2 Sn DIP LCP黑色	
				PART NO.:	
				BS-06-A4BK016	
				DRAW NO.:MY-CP-0082	