



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PA66 UL94 V-0 HALOGEN FREE

b.CONTACT:PHOSPHOR BRONZE

(SURFACE PLATING: Sn100u"~120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C ~ +85°C

ORDERING INFORMATION

BS-01-A***002

电池座系列

BS-01系列

DIP 90° TYPE


PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2019-05-21

LQ. HUANG

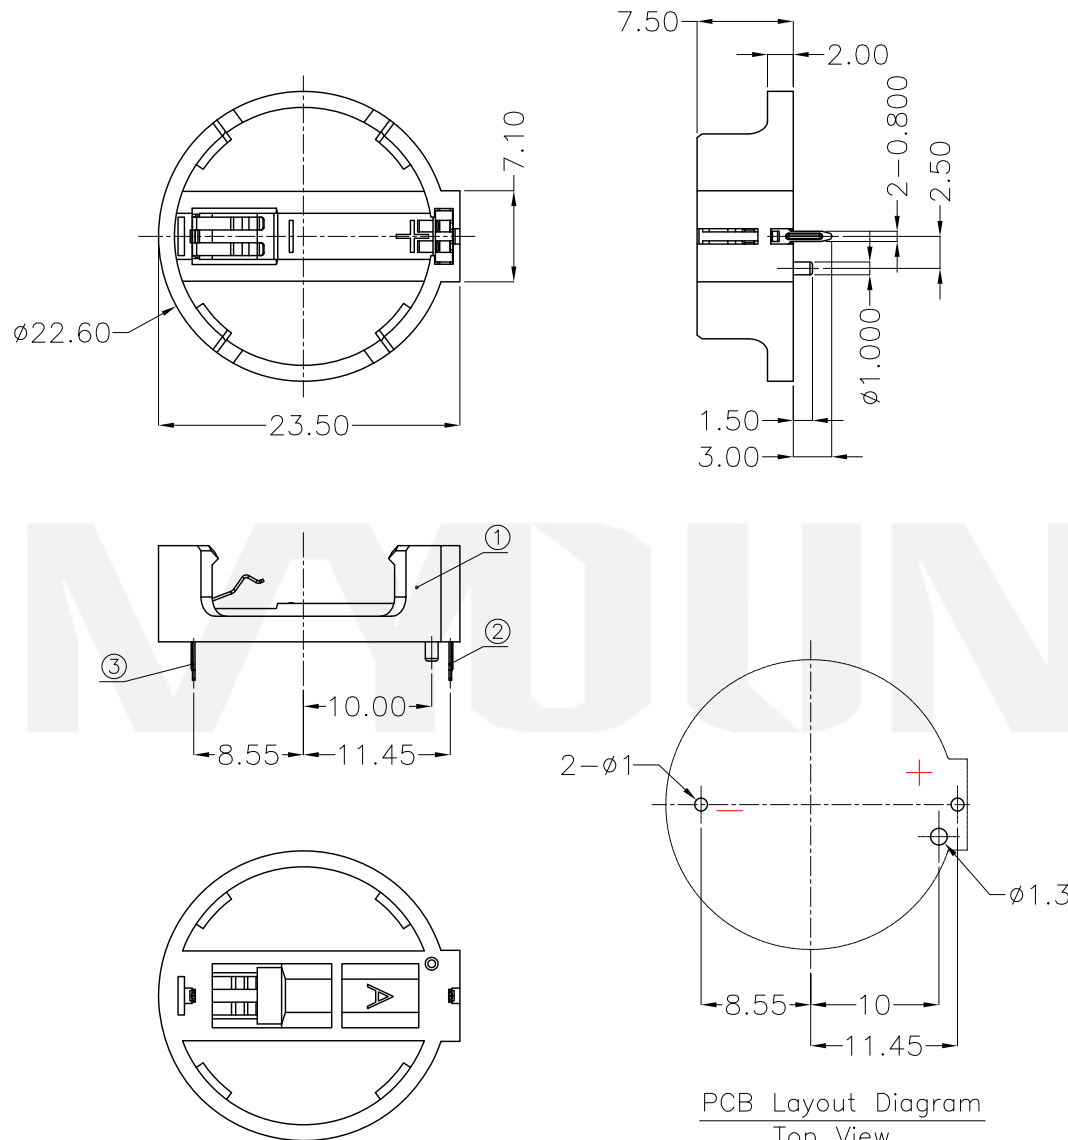

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	PHOSPHOR BRONZE,T=0.20mm	Sn Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE,T=0.20mm	Sn Plating
1	HOUSING	1	PA66 UL94 V-0 HALOGEN FREE	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com			
DECIMALS:	ANGLES:	DSND	YangFeng	DATE	2017-07-14
X : ± 0.30	X : $\pm 1^\circ$	CHKD	ZhouRuicai	DATE	2017-07-14
X.X : ± 0.25	X.X : $\pm 0.5^\circ$	APVD	XueShunYong	DATE	2017-07-14
X.XX : ± 0.20					
X.XXX : ± 0.10					
WEIGHT:1.09g		SCALE: 2:1	SIZE: A4	VIEW:	TITLE: BS-2032-1 防呆
SHEET 1 OF 1		UNIT: mm	REV.: A/1	OBJECT: MY	PART NO.: BS-01-A1BK002
					DRAW NO.:MY-CP-0091